THERMAL TRANSFER RANGE /

THERMOCODE 32E Utritional Information Ivutinina momaton Ivpical values per 1008 / Ener on Do Contractor and the second

THE PERFECT ENTRY INTO THE THERMAL TRANSFER CODING WORLD

GE INSTRUCTIONS: Store in a cool, dry

e. Once opened keep refigerated and use

red in ingredients declaration

10.6%), Salt

ater.

Salt 0.9g Batch:

Best Before: 04, 04.04.18

Sound Lenked, Fai U. C. Saturates O. O. Carbolyo Saturates with Carine of Which SUBASS 47.90

The Thermocode 32E is an ideal first step into using intermittent Thermal Transfer coding technology where regular date, batch and price code changes, real-time coding, barcoding and graphics are required. It is extremely user friendly, with on-board printer diagnostics and no mechanical adjustments required for print quality. Suitable for all intermittent motion packaging and labelling machinery.

TRUSTED BLOODLINE

The 32E utilises many of the features of the well proven Series 2 range. It is compact and can be easily installed on to most types of intermittent motion labelling and packaging machinery.



The 32E is supplied pre-loaded with a selection of commonly used print formats along with three fonts, one Bitmap (.sfp) and two True Type (.ttf). These print formats can be edited and saved via the display module.



SIMPLE TO OPERATE

The 32E does not use compressed air and no mechanical levelling or height adjustments are required for print quality. Print pressure, burn values and speed adjustments are all carried out via the display module and individually stored within the print format.



MAIN FEATURES



- No mechanical adjustments
- 32mm x 30mm (1.25" x 1.18") print area
- **Multi-function display**
- **Multi-level access**
- Multi-language facility
- End of ribbon alarm




- 300 dpi (12 dots/mm) print resolution
- Up to 300m (984ft) ribbon capacity
- Simple ribbon threading
- Precision engineered design
- **Proven technology**
- Full networking capability



- Printer status display
- Self-levelling printhead
- All electronic operation
- 1.5Mb memory
- Password protected access
- User friendly

THERMAL TRANSFER RANGE /

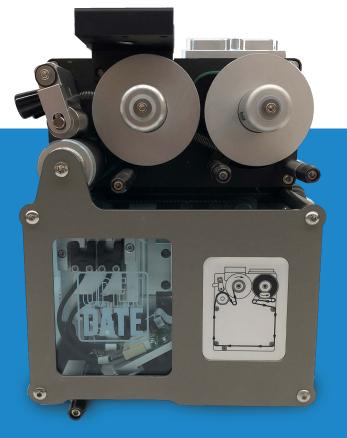

Open Date thermal transfer ribbon is available in a wide range of sizes, colours and qualities to suit the entire range of Thermocode printers plus most other makes and models. Extended warranty terms apply when Open Date ribbon is used in conjunction with Thermocode printers.

THERMOCODE 32E Specifications

Maximum print area	32 x 30 1
Print resolution	300dpi
Maximum ribbon length	300m (
Maximum ribbon width	3 5mm
Maximum ribbon dia.	65mm (
Maximum print speed	400mm
Maximum cycles	350 per
1aximum baud rate	115,200
Memory capacity	1.5Mb
Supply voltage	100/240
Printer weight	5kg (11.0
Power supply weight	4.5kg (§

32 x 30mm (21.25" x 1.18") 300dpi (12 dots/mm) 300m (984ft) 35mm (1.37") 65mm (2.56") 400mm (15.75") per second 350 per minute 115,200bps 1.5Mb 100/240v AC, 50/60Hz 5kg (11.02lbs) 4.5kg (9.92lbs)

IDEAL SOLUTION FOR...... (







Close to fifty years the Open Date Group has been a world leader in the innovative design and manufacture of On and Off-line Coding, Marking and Overprinting systems for use on most kinds of flexible packaging materials and labels. We believe each product should be developed with the customer in mind and manufactured to the finest engineering standards possible. Our aim is to use our experience and engineering skills to provide equipment that is fit for purpose, reliable, minimises down time and is easy to use. In order to be the best solution provider to suit your needs we offer a comprehensive range of Hot Foil and Thermal Transfer overprinting systems with Debossers and Carton Feeders coupled with first-class installation and after sales service, as well as consumables. Our products are designed and manufactured in the UK with wholly owned operations in the USA, France, Germany and the Philippines and a strong network of resellers and agents all over the world. We have confidence in providing you support all over the globe.

Open Date Equipment Ltd. Unit 9 Puma Trade Park, 145 Morden Road, Mitcham, Surrey, CR4 4DG United Kingdom Tel: +44 (0) 20 8655 4999 Fax: +44 (0)20 8655 4990

Email: sales@opendate.co.uk

Open Date

Systems, Inc. Springfield Road, PO Box 538 Georges Mills, NH 03751 U.S.A.

Tel: +(1) 603 763 3444 Fax: +(1) 603 763 4222 Toll free: 877-OPENDATE Email: info@opendate.com Open Date France Z.I. D'Attichy 60350 Attichy France

Tel: +33 (0) 344 42 94 43 **Fax:** +33 (0) 344 42 17 17

Email: info@opendatefrance.com

www.opendate.com

COSMETICS

Open Date GmbH Mittlere Stämmig 4 97297 Üttingen Germany

Tel: +49(0)936998240 **Fax:** +49(0)9369982424

Email: info@opendate.de